

Product Information


PI 101_0614



micrologic® PREMIUM 101

Synthetic Liquid Grease

Unique, fully synthetic ingredient with PTFE for long- lasting lubrication.

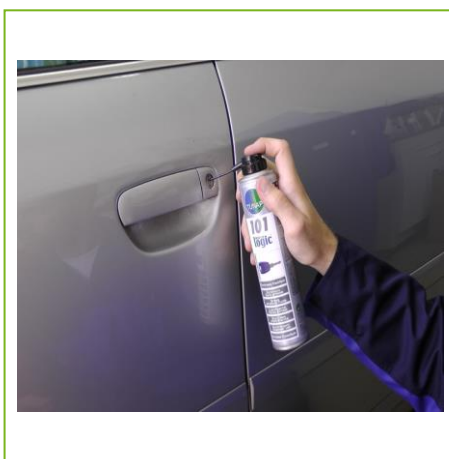

Properties:

- Great creep behaviour
- Temperature resistance from -40°C up to +150°C
- Very good corrosion protection
- No resinification or adhesion
- Cold and hot water-proof
- Reduces wear and friction
- Pleasant aroma

Area of application:


- With each maintenance and inspection
- Long-lasting precision lubrication
- All movable, metal components
- Anywhere where oil spray is too short lived
- Joints, hinges, moving parts, bolts, striker plates, closing cylinder, locks, sliding rails, levers, gears, etc.

Application :

Shake can well until the ball-bearings become audible. Clean the surface to be treated if necessary. Spray liquid grease evenly from a distance of ca. 20 cm. If necessary repeat process. Increase the creep by spraying from a short distance.

Product Description	Quantity	Article number	Packaging Unit
Synthetic Liquid Grease	Aerosol canister 300ml	MP 10100300AB	24

Authorised TUNAP Centre



www.aetautoworld.wix.com/aetautoworld

TUNAP | Chemistry with drive.

Data and information contained herein are the result of careful test. They only can be considered as recommendation which correspond to the level of experience of today. The data are given in good faith and believed to be accurate. However, in view of the multiplicity of possible application and working methods we are not in a position to assume any responsibility or obligations deriving from the use of our products. Further, you expressly understand and agree that the data and information hereunder are given gratis and we assume no obligation or liability. The product information is only valid in the latest version.

TUNAP Deutschland Vertriebs GmbH & Co. Betriebs KG | D-82515 Wolfratshausen | Tel. 08171 / 1600-0 | info@tunap.com | www.tunap.com

TUNAP.COM